


OPENING SYSTEMS FOR FLAP AND DROP DOWN DOORS



KRABY 244 mm - LIFT UP - Friction version

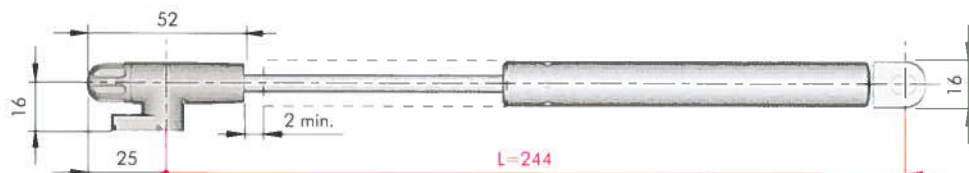

ZAnk EP ST

= 100 pcs.



42011010NN

45

42012010NN


60

42013010NN

90

42014010NN



120



h	w	450		600		900		1200		1500	
		Kg	Kraby	Kg	Kraby	Kg	Kraby	Kg	Kraby	Kg	Kraby
300-350	1,6 - 1,8	1 x 45 N	2,1 - 2,5	1 x 60 N	3,2 - 3,7	2 x 45 N	4,2 - 4,9	2 x 45 N	5,3 - 6,1	2 x 60 N	
351-400	1,8 - 2,1	1 x 45 N	2,5 - 2,8	1 x 60 N	3,7 - 4,2	2 x 45 N	4,9 - 5,6	2 x 60 N	6,1 - 7,0	2 x 90 N	
401-450	2,1 - 2,4	1 x 60 N	2,8 - 3,2	2 x 45 N	4,2 - 4,7	2 x 60 N	5,6 - 6,3	2 x 90 N	7,0 - 7,9	2 x 90 N	
451-500	2,4 - 2,6	2 x 45 N	3,2 - 3,5	2 x 60 N	4,7 - 5,3	2 x 60 N	6,3 - 7,0	2 x 120 N			

Further newton strengths available on request.

The above chart refers to chipboard or MDF 18 mm doors and aluminium frame doors with glass 4 mm thick.
These are experimental results to be checked by the customer.
Our Technical Department is at your disposal to test further cases out of this chart.

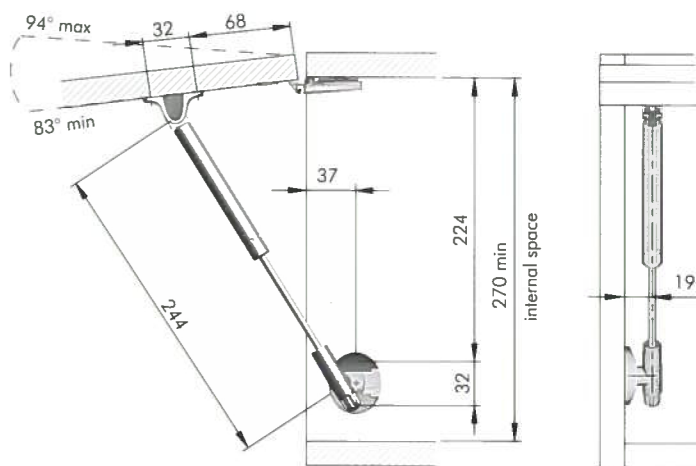


The dimensions of the above drilling plan refer to carcasses which use **standard sprung hinges** and mounting plates 0 mm.
Please note that min and max opening angle shown data is purely indicative. It varies with respect to the hinge brand and adjustment carried out.

OPENING SYSTEMS FOR FLAP AND DROP DOWN DOORS



KRABY 244 mm - LIFT UP - Automatic version

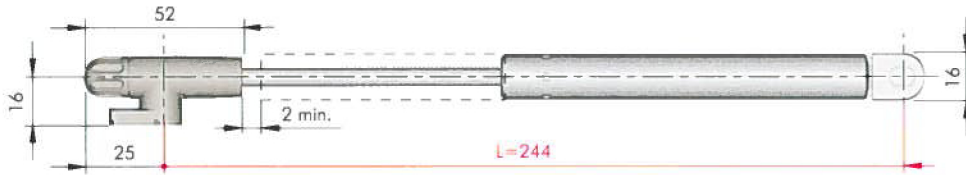

ZAnk EP ST

= 100 pcs.





42110010NN	50
42111010NN	80
42112010NN	100
42113010NN	120



h	w	450		600		900		1200		1500	
		Kg	Kraby	Kg	Kraby	Kg	Kraby	Kg	Kraby	Kg	Kraby
300-350		1,6 - 1,8	1 x 80 N	2,1 - 2,5	1 x 80 N	3,2 - 3,7	2 x 80 N	4,2 - 4,9	2 x 80 N	5,3 - 6,1	2 x 100 N
351-400		1,8 - 2,1	1 x 80 N	2,5 - 2,8	2 x 50 N	3,7 - 4,2	2 x 80 N	4,9 - 5,6	2 x 100 N	6,1 - 7,0	2 x 120 N
401-450		2,1 - 2,4	2 x 50 N	2,8 - 3,2	2 x 80 N	4,2 - 4,7	2 x 100 N	5,0 - 6,3	2 x 120 N	7,0 - 7,9	2 x 120 N
451-500		2,4 - 2,6	2 x 80 N	3,2 - 3,5	2 x 80 N	4,7 - 5,3	2 x 120 N				

Further newton strengths available on request.

The above chart refers to chipboard or MDF 18 mm doors and aluminium frame doors with glass 4 mm thick.
These are experimental results to be checked by the customer.
Our Technical Department is at your disposal to test further cases out of this chart.

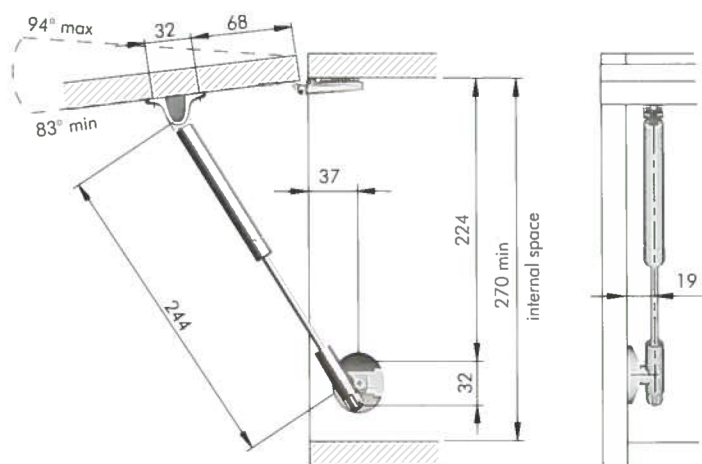

The dimensions of the above drilling plan refer to carcasses which use **standard sprung hinges** and mounting plates 0 mm.
Please note that min and max opening angle shown data is purely indicative. It varies with respect to the hinge brand and adjustment carried out.